



**Tough on the outside.
Smart on the inside.**

**M211 Label Printer
M210 Label Printer**

M211 Label Printer

The world's most trusted labeler, now optimized for mobile. Seamlessly design, view and print labels from Brady's industry-leading Express Labels Mobile App. Design on-screen. Print on-demand. Label on-site. The tough, compact labeler that belongs on any job site.



Top applications



Wire and cable

Sleeves, self-lam, wire wraps, flag labels, cable markers




DataCom

Self-lam, flag labels, patch-panel, face plate labeling



Electrical

Sleeves, self-lam, wire wraps, cable markers, flag and raised panel



Lean / 5S

Rack, gauge, part bin labeling



General identification

Directional marking, equipment labeling

Unique features

- Prints labels with the Express Labels Mobile App, for iOS and Android
- Withstands 6-foot drops, is crush-resistant to 250 lbs. and has military-grade shock resistance
- Advanced battery technology for all-day use; prints 300 labels on a full charge
- 11 label design guides, 22 barcode symbologies, 85 fonts, 31 languages and over 1,400 symbols
- Imports data from spreadsheets and allows label saving and label sharing
- 90+ cartridges, made from 12 unique materials, with continuous and pre-sized label widths between 0.25 (6.4 mm) to 0.75 (19.1 mm) inches

Label output

Speed: Prints up to 100 labels / day at 0.60 inches (15.2 mm) per second

Quality: 203 dpi print resolution

Optional accessories

- Attachable magnet for hands-free label creation
- Belt clip provides hands-free transport
- Hard and soft carrying cases to protect your label printer and keep accessories organized
- Power brick charges label printer, phone or tablet

Available kits

Printer with accessory kit





New pre-sized labels

Rounded corners

Maximize full label

Consistent size

Available Material :
B-427, B-423 and B-499

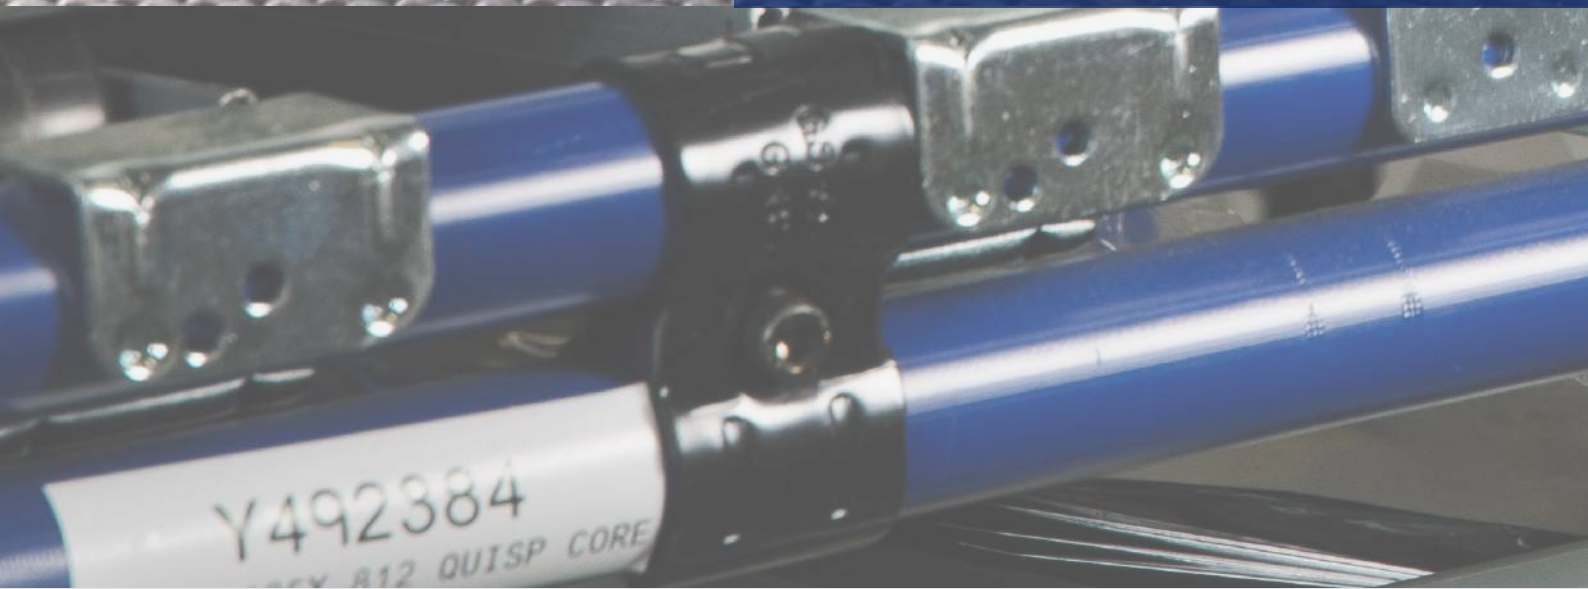

M210-LAB Label Printer

The M210-LAB label printer takes on your toughest labeling applications in the lab. Whether you're labeling beakers for short experiments or dropping vials in a cryo freezer, the label materials and built-in label creation guides are a perfect partnership for your laboratory. And with smart automatic formatting, you're set to go in seconds.



Top applications



Laboratory

Vial, tube, slide labeling,
sample identification



General identification

Directional marking,
equipment labeling

Unique features

- Automatic label formatting, including five pre-loaded application design guides, for rapid and accurate lab label creation
- Ability to store 12 label files up to 2MB and an on-board library of 133 symbols
- Hot keys and menu options for fast label creation
- Ability to create UPC, DataMatrix and QR Codes
- 90+ compatible easy-to-load cartridges (continuous and pre-sized), including materials specifically designed to withstand lab environments

Label output

Speed: Prints up to 100 labels / day at 0.4 inches (10.2 mm) per second

Quality: 203 dpi print resolution

Optional accessories


- Multi-functional tool that includes a heavy-duty magnet, retractable stand and flashlight
- Attachable magnet for hands-free label creation
- Rechargeable Li-Ion battery pack
- Hard and soft carrying cases to protect your label printer and keep accessories organized

Available kits

Printer with accessory kit

M210 Label Printer

Shiny new name. Same trusted experience. Now with more materials and pre-sized labels to take on your toughest on-site labeling challenges to get the job done right — and done quickly. With smart automatic formatting, all you need to do is drop in a label cartridge, type and print.

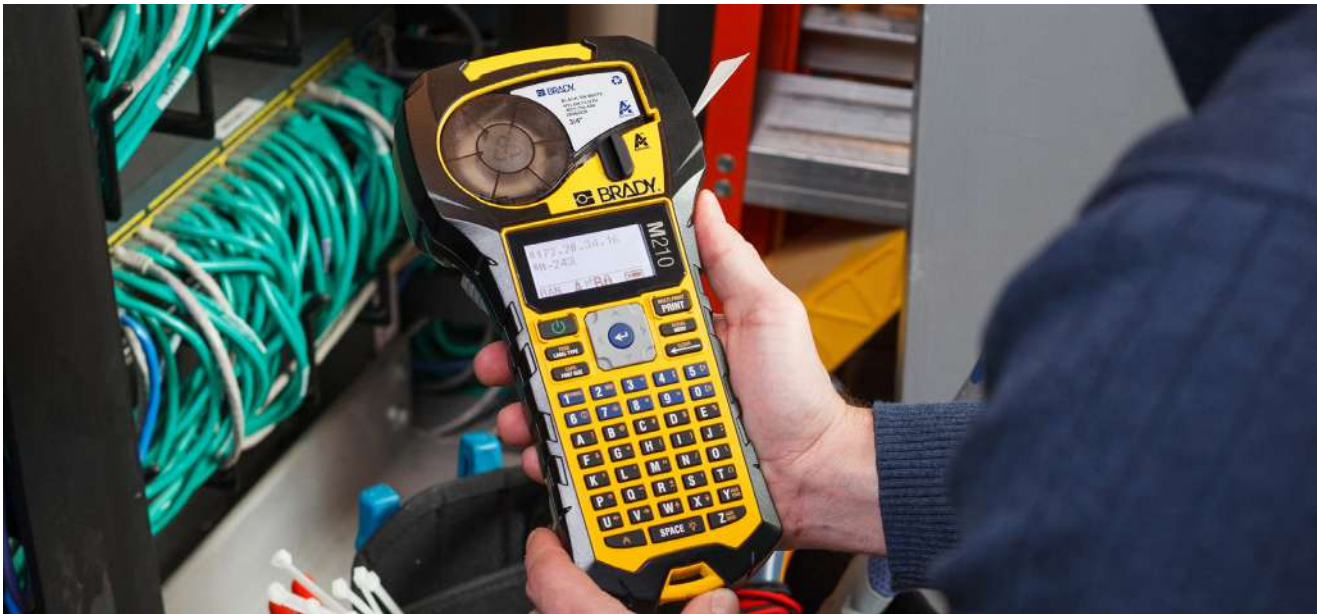

Top applications



Wire and cable

Sleeves, self-lam, wire wraps, flag labels, cable markers




DataCom

Self-lam, flag labels, patch-panel, face plate labeling



Electrical

Sleeves, self-lam, wire wraps, cable markers, flag and raised panel



Lean / 5S

Rack, gauge, part bin labeling



General identification

Directional marking, equipment labeling

Unique features

- Auto-format labels with 11 pre-loaded application design guides for rapid and accurate label creation
- Military-grade shock and vibration resistance per MIL-STD-810G Method 5.16.6 SA4.6.5 — drop tested to withstand the roughest job sites
- Easy-to-access hot keys and menus for fast label creation, on-board symbols and the ability to store 12 label files up to 2MB
- Ability to create UPC, DataMatrix, and QR Codes
- Onboard label material gauge that tracks the amount of material left in the cartridge
- 90+ compatible easy-to-load cartridges with continuous and pre-sized label widths between 0.25 (6.4 mm) to 0.75 (19.1 mm) inches

Label output

Speed: Prints up to 100 labels / day at 0.40 inches (10.2 mm) per second

Quality: 203 dpi print resolution

Optional accessories

- Multi-functional tool that includes a heavy-duty magnet, retractable stand and flashlight
- Attachable magnet for hands-free label creation
- Rechargeable Li-Ion battery pack
- Hard and soft carrying cases to protect your label printer and keep accessories organized

Available kits

Printer with accessory kit



BRADY
BLACK ON WHITE
NYLON CLOTH
-M21-750-499
28982828
3/4"

BRADY

M210

Banner Landsc
WireMarker
Terminal Block
6 pt BA

POWER

FEED LABEL TYPE

CAPS FONT SIZE

MULTI-PRINT
PRINT

SERIAL
MENU

CLEAR

1 SYMBOL

2

3

4

5

6

7

8

9

0

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

Q

R

S

T

U

V

W

X

Y

U

V

W

X

Y

SPACE

ADD DATE

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

ADD TIME

Indoor and outdoor vinyl labels for safety, facility and lean / 5S (B-595)

Continuous vinyl material ideal for lean / 5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, suitable for rough surfaces and outdoor use. 8-10 years average outdoor durability.* Temp. range: -40° F to 180° F (-40° C to 82° C). UL recognized.



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
Fig. 33b	M21-250-595-WT	B-595	Vinyl	Black on white	0.250 (6.35)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-375-595-WT	B-595	Vinyl	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-500-595-WT	B-595	Vinyl	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-750-595-WT	B-595	Vinyl	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-250-595-YL	B-595	Vinyl	Black on yellow	0.250 (6.35)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-375-595-YL	B-595	Vinyl	Black on yellow	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-500-595-YL	B-595	Vinyl	Black on yellow	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-750-595-YL	B-595	Vinyl	Black on yellow	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-375-595-OR	B-595	Vinyl	Black on orange	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-500-595-OR	B-595	Vinyl	Black on orange	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-750-595-OR	B-595	Vinyl	Black on orange	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-375-595-BK	B-595	Vinyl	White on black	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-BK	B-595	Vinyl	White on black	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-BK	B-595	Vinyl	White on black	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-RD	B-595	Vinyl	White on red	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-RD	B-595	Vinyl	White on red	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-RD	B-595	Vinyl	White on red	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-BL	B-595	Vinyl	White on blue	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-BL	B-595	Vinyl	White on blue	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-BL	B-595	Vinyl	White on blue	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-BR	B-595	Vinyl	White on brown	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-BR	B-595	Vinyl	White on brown	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-BR	B-595	Vinyl	White on brown	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-GN	B-595	Vinyl	White on green	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-GN	B-595	Vinyl	White on green	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-GN	B-595	Vinyl	White on green	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-PL	B-595	Vinyl	White on purple	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-500-595-PL	B-595	Vinyl	White on purple	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-750-595-PL	B-595	Vinyl	White on purple	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4400
Fig. 33b	M21-375-595-GY	B-595	Vinyl	Black on gray	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-500-595-GY	B-595	Vinyl	Black on gray	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-750-595-GY	B-595	Vinyl	Black on gray	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6000

*Average expected outdoor life of product will depend on user definition of failure, climatic conditions, mounting techniques and material color. The 8 to 10 year outdoor durability applies to the vinyl label stock only; ribbon durability will vary.

Patch panel adhesive strips (B-499 and B-595)

Continuous material for port identification features user-specified spacing when using patch panel mode.

- **B-499 permanent nylon cloth** - Durable industrial strength material designed to conform to curved or flat surfaces
- **B-595 permanent vinyl** - Very pliable, suitable for rough surfaces and outdoor use. Offers excellent resistance to oils, detergents, dirt, grime and many solvents




Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
B-499 nylon cloth								
Fig. 33b	M21-375-499	B-499	Nylon cloth	Black on white	0.375 (9.53)	16 (4.88)	1 roll (cont.)	R4300
Fig. 33b	M21-500-499	B-499	Nylon cloth	Black on white	0.500 (12.70)	16 (4.88)	1 roll (cont.)	R4300
B-595 vinyl								
Fig. 33b	M21-375-595-WT	B-595	Vinyl	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6000
Fig. 33b	M21-500-595-WT	B-595	Vinyl	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6000

Terminal block adhesive strips (B-499)

Continuous, narrow nylon cloth strips for alignment on terminal blocks. The printer's terminal block mode allows for user-specified spacing.



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
Fig. 33b	M21-375-499-TB	B-499	Nylon cloth	Black on white	0.375 (9.53)	16 (4.88)	1 roll (cont.)	R4300
Fig. 33b	M21-500-499-TB	B-499	Nylon cloth	Black on white	0.500 (12.70)	16 (4.88)	1 roll (cont.)	R4300

Nylon cloth wire and cable labels (B-499)

Continuous labels wrap around wires and are highly pliable, conforming to tightly curved surfaces. When in wire marker mode, text auto-repeats on the label. Labels can also be used for flagging with the flag mode.




Figure 29



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
Fig. 33b	M21-375-499	B-499	Nylon cloth	Black on white	0.375 (9.53)	16 (4.88)	1 roll (cont.)	R4300
Fig. 33b	M21-500-499	B-499	Nylon cloth	Black on white	0.500 (12.70)	16 (4.88)	1 roll (cont.)	R4300
Fig. 33b	M21-750-499	B-499	Nylon cloth	Black on white	0.750 (19.05)	16 (4.88)	1 roll (cont.)	R4300

Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Label Height B inch (mm)	Labels per roll	Ribbon in cartridge
Fig. 29	M21-11-499	B-499	Nylon cloth	Black on white	0.500 (12.7)	0.750 (19.1)	140	R4300
Fig. 29	M21-131-499	B-499	Nylon cloth	Black on white	0.500 (12.7)	1.000 (25.4)	121	R4300
Fig. 29	M21-18-499	B-499	Nylon cloth	Black on white	0.750 (19.1)	1.000 (25.4)	121	R4300
Fig. 29	M21-136-499	B-499	Nylon cloth	Black on white	0.750 (19.1)	1.500 (38.1)	91	R4300
Fig. 29	M21-137-499	B-499	Nylon cloth	Black on white	0.750 (19.1)	2.000 (50.8)	73	R4300

Self-laminating vinyl wire and cable labels (B-427)

Labels feature a clear, non-printable area that wraps around the print-on area to protect text. Vinyl material offers superior resistance to solvents, oil, grease, dirt and water. Temp. range: -40° F to 158° F (-40° C to 70° C). UL recognized.




Figure 32




Figure 42b



Figure	Catalog #	B#	Material	Color	Approx. wire gauge	Label width A inch (mm)	Roll length B feet (m)	Print-on area C inch (mm)	Labels per roll	Ribbon in cartridge
Fig. 42b	M21-750-427	B-427	Vinyl	Black on white	16 to 10	0.75 (19.05)	14 (4.27)	0.375 (9.53)	1 roll (cont.)	R4300
Fig. 42b	M21-1000-427	B-427	Vinyl	Black on white	12 to 10	1.00 (25.40)	14 (4.27)	0.375 (9.53)	1 roll (cont.)	R4300
Fig. 42b	M21-1250-427	B-427	Vinyl	Black on white	10 to 4	1.25 (30.48)	14 (4.27)	0.50 (12.70)	1 roll (cont.)	R4300
Fig. 42b	M21-1500-427	B-427	Vinyl	Black on white	10 to 4	1.50 (38.10)	14 (4.27)	0.50 (12.70)	1 roll (cont.)	R4300

Figure	Catalog #	B#	Material	Color	Approx. wire gauge	Label width A inch (mm)	Roll length B feet (m)	Print-on area C inch (mm)	Labels per roll	Ribbon in cartridge
Fig.32	M21-11-427	B-427	Vinyl	Black on white	22 to 16	0.5 (12.7)	0.75 (19.05)	0.375 (9.53)	150	R4300
Fig.32	M21-18-427	B-427	Vinyl	Black on white	22 to 16	1.000 (25.4)	0.75 (19.05)	0.375 (9.53)	121	R4300

Laboratory labels (B-461 and B-7425)

- **B-461 polyester** - all-white material with smudge resistance, solvent resistance and is suitable for low-temperature applications
- **B-7425 polypropylene** - economical white material with chemical and high-temperature resistance



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
B-461 polyester								
Fig. 33b	M21-375-461	B-461	Polyester	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-500-461	B-461	Polyester	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-750-461	B-461	Polyester	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4300
B-7425 polypropylene								
Fig. 33b	M21-375-7425	B-7425	Polypropylene	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-500-7425	B-7425	Polypropylene	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-750-7425	B-7425	Polypropylene	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4300

PermaSleeve® PS Heat-shrink Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant. Temp range: -67° F to 275° F (-55° C to 135° C). RoHS compliant and UL recognized.

Meets specifications:

- SAE-AS-23053/5
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202




Figure 33b



Figure	Catalog #	B#	Material	Color	Approx. wire gauge	Max wire dia. inch (mm)	Supplied dia. A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
Fig. 33b	** M21-125-C-342	B-342	Polyolefin	Black on white	22 to 16	0.046 - 0.110 (1.2 - 2.8)	0.125 (3.2)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-187-C-342	B-342	Polyolefin	Black on white	20 to 10	0.062 - 0.150 (1.6 - 3.8)	0.187 (4.9)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-250-C-342	B-342	Polyolefin	Black on white	16 to 8	0.094 - 0.215 (2.4 - 5.5)	0.250 (6.9)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-375-C-342	B-342	Polyolefin	Black on white	12 to 4	0.125 - 0.320 (3.2 - 8.1)	0.375 (10.7)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-125-C-342-YL	B-342	Polyolefin	Black on yellow	22 to 16	0.046 - 0.110 (1.2 - 2.8)	0.125 (3.2)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-187-C-342-YL	B-342	Polyolefin	Black on yellow	20 to 10	0.062 - 0.150 (1.6 - 3.8)	0.187 (4.9)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-250-C-342-YL	B-342	Polyolefin	Black on yellow	16 to 8	0.094 - 0.215 (2.4 - 5.5)	0.250 (6.9)	7 (2.13)	1 roll (cont.)	R4300
Fig. 33b	** M21-375-C-342-YL	B-342	Polyolefin	Black on yellow	12 to 4	0.125 - 0.320 (3.2 - 8.1)	0.375 (10.7)	7 (2.13)	1 roll (cont.)	R4300

** ⚠ **WARNING:** Cancer www.P65Warnings.ca.gov

Polyester labels for inside panel markings and general identification (B-423, B-430 and B-488)

- **B-423 polyester** - white glossy polyester with permanent adhesive
- **B-430 polyester** - clear glossy polyester with permanent adhesive
- **B-488 polyester** - solvent-resistant, white matte polyester with permanent adhesive




Figure 29



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
B-423 gloss white polyester								
Fig. 33b	M21-250-423	B-423	Polyester	Black on white	0.250 (6.35)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-375-423	B-423	Polyester	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-500-423	B-423	Polyester	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-750-423	B-423	Polyester	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6200
B-430 gloss clear polyester								
Fig. 33b	M21-250-430	B-430	Polyester	Black on clear	0.250 (6.35)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-375-430	B-430	Polyester	Black on clear	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-500-430	B-430	Polyester	Black on clear	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-750-430	B-430	Polyester	Black on clear	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-250-430-WT-CL	B-430	Polyester	White on clear	0.250 (6.35)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-375-430-WT-CL	B-430	Polyester	White on clear	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-500-430-WT-CL	B-430	Polyester	White on clear	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33b	M21-750-430-WT-CL	B-430	Polyester	White on clear	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R6200
B-488 matte white polyester								
Fig. 33b	M21-375-488	B-488	Polyester	Black on white	0.375 (9.53)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-500-488	B-488	Polyester	Black on white	0.500 (12.70)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-750-488	B-488	Polyester	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4300

Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Label Height B inch (mm)	Labels per roll	Ribbon in cartridge
B-423 gloss white polyester								
Fig. 29	M21-7-423	B-423	Polyester	Black on white	0.500 (12.7)	0.750 (19.1)	140	R6200
Fig. 29	M21-17-423	B-423	Polyester	Black on white	0.500 (12.7)	1.000 (25.4)	121	R6200
Fig. 29	M21-18-423	B-423	Polyester	Black on white	0.750 (19.1)	1.000 (25.4)	121	R6200
Fig. 29	M21-30-423	B-423	Polyester	Black on white	0.750 (19.1)	1.500 (38.1)	91	R6200
Fig. 29	M21-137-423	B-423	Polyester	Black on white	0.750 (19.1)	2.000 (50.8)	73	R6200

Water-dissolvable paper labels (B-403)

Continuous paper material designed for temporary identification. Material completely dissolves in warm water within 30 seconds, leaving no adhesive residue.



Figure 33b



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Ribbon in cartridge
Fig. 33b	M21-750-403	B-403	Dissolvable paper	Black on white	0.750 (19.05)	21 (6.40)	1 roll (cont.)	R4300
Fig. 33b	M21-500-403	B-403	Dissolvable paper	Black on white	0.500 (12.7)	21 (6.40)	1 roll (cont.)	R4300

Repositionable Vinyl Material (B-581)

Indoor / outdoor vinyl is a high-gloss, durable, flexible material designed with special adhesive to easily remove and reapply.



Figure 33



Figure	Catalog #	B#	Material	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Rec. ribbon
Fig. 33	M21-500-581-WT	B-581	Vinyl	Black on white	0.500 (12.7)	21 (6.40)	1 roll (cont.)	R6200
Fig. 33	M21-750-581-WT	B-581	Vinyl	Black on white	0.750 (19.1)	21 (6.40)	1 roll (cont.)	R6200

Printer specifications

Printer	
Printer name	M211 Label Printer
Print resolution	203 dpi
Print speed in. / sec (mm / sec)	0.6 (15.2)
Weight (lbs.)	1.20
Applications	Wire and cable DataCom Electrical Lean / 5S General identification
Features	
Maximum labels per day	100
Onboard memory (MB)	-
Cutter type	Auto cutter
Power	
Battery options	Non-Removable Rechargeable Li-Ion battery
Battery recharge time (hr.)	2.5
Print functions	
Built-in wizards	Wire wrap, terminal block, patch panel, flag label, breaker box, blank, vial, tube, slide, sleeve
Barcode symbologies	DataMatrix, QR Code, PDF417, Code 39, 39 Full ASCII, Code 93, Code 93 Full ASCII, 128, 128A, 128B, 128C, GS1-128, HIBC, Interleaved 2 of 5, UPC-A, UPC-E
Number of onboard symbols	1,400+
Communication and interface	
Connectivity options	Bluetooth
Software compatibility	Express Labels Mobile App
Media	
Label width in. (mm)	0.25 (6.4) -0.75 (19.1)
Label types	Continuous and pre-sized
Label cartridges	All-in-one ribbon and tape
Label materials	12 material types 90+ label parts
Maximum printed label length in. (mm)	99.9 (2537.5)

Printer	
Printer name	M210/M210-LAB Label Printer
Print resolution	203 dpi
Print speed in. / sec (mm / sec)	0.4 (10.2)
Weight (lbs.)	1.66
Applications	Wire and cable DataCom Electrical Lean / 5S General identification
Features	
Maximum labels per day	100
Onboard memory (MB)	2
Cutter type	Manual cutter
Power	
Battery options	6 AA batteries Rechargeable Li-Ion battery AC adapter
Battery recharge time (hr.)	2.5
Print functions	
Built-in wizards	Wire marker, terminal block, patch panel, custom length, fixed length, flag label, breaker box, banner landscape, portrait landscape
Barcode symbologies	Code 39, Code 128, DataMatrix, QR Codes
Number of onboard symbols	193
Communication and interface	
Connectivity options	—
Software compatibility	—
Media	
Label width in. (mm)	0.25 (6.4) -0.75 (19.1)
Label types	Continuous and pre-sized
Label cartridges	All-in-one ribbon and tape
Label materials	12 material types 90+ label parts
Maximum printed label length in. (mm)	99.9 (2537.5)

M210 Label Printer



M210-LAB

Handheld Label Maker



M210

Handheld Label Maker



M210-KIT

Hard case, AC adapter,
Li-Ion battery pack

M210 Label Printer Accessories



M210-HC
Ergonomic Handle
Metal Clips
Blue Exterior



M210-AC
Adapters & Battery
Chargers



M210-BATT
Rechargeable
Li-ion Battery Pack



M21-MAGNET
Black

M211 Label Printer



M211
Portable Bluetooth
Label Printer



M211-KIT
Hard case, magnet,
belt clip, power brick*

M211 Label Printer Accessories



M211-HC
Ergonomic Handle
Metal Clips
Blue Exterior



M211-AC
Adapters & Battery
Chargers



M21-BELTCLIP
Stainless Steel Clip
Tapered, Slim Design



M21-MAGNET
Black

* Subject to compliance by different countries

**We identify and protect premises,
products and people.**

For more information or to learn more about our innovative products, visit BradyID.com.sg or call +65 6477 7261.



Tri Solution Co.,Ltd.

**41 Soi Tiwanon 25, Yaek 29, Bang Kraso, Mueang,
Nonthaburi 11000 Thailand ID# 0125552013483**

Tel: 662 078-6111 , 662 968-7510-11

Tel: 097-1878499, 083-4329377 (Sales)

www.tri-solution.com Line ID: @trisolution

AUSTRALIA (612) 8717 6300

CHINA (86) 21 6100 6588

HONG KONG (852) 2216 9283

INDIA (91) 80 6658 2900

INDONESIA (65) 6477 7261

JAPAN (81) 042 655 2535

MALAYSIA (60) 4 810 1688

PHILIPPINES (65) 6477 7261

SINGAPORE (65) 6477 7261

SOUTH KOREA (02) 2192 0700

TAIWAN (86) 2 2657 6108

THAILAND (66) 2173 4380

VIETNAM (65) 6477 7261